

## 20mA LDO voltage regulator (output voltage 1.1V/1.2V/1.3V/1.4V)

### OVERVIEW


055TSMC\_LDO\_09 IP is cap-based LDO voltage regulator designed to convert IO voltage 2.5V to 1.2V and supply analogy circuits with load up to 20mA. The output voltage can be programmable in the range from 1.1V to 1.4V.

Reference voltage 600V and reference current 10uA should be applied for IP operation.

IP technology: TSMC 55nm EF.

IP status: silicon proven.

Silicon area: 0.027mm<sup>2</sup>.

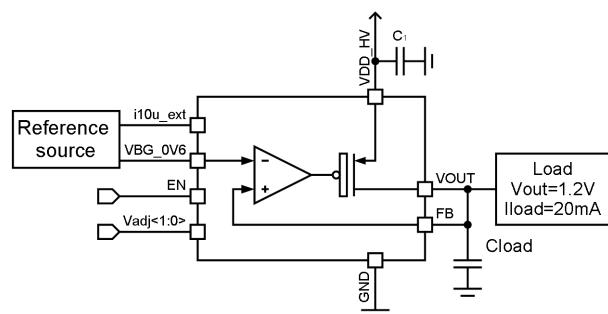

### ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Value			Units
			min	typ.	max	
Supply voltage	V <sub>DD_HV</sub>	-	2.25	2.5	3.6	V
Operating temperature range	T <sub>j</sub>	-	-40	27	+85	°C
Reference current	I <sub>i10u</sub>	-	-	10	-	uA
Reference voltage	V <sub>VBG</sub>	-	-	600	-	mV
Current consumption	I <sub>CC</sub>	I <sub>load</sub> = 20mA, without I <sub>i10u</sub>	7.0	7.4	7.8	uA
Line regulation	dV <sub>VOUT</sub>	2.25 < V <sub>DD_HV</sub> < 3.6V; I <sub>load</sub> = 20mA	-	-	1.5	%
Load regulation	dI <sub>VOUT</sub>	V <sub>DD_HV</sub> =3.3V; 100uA < I <sub>load</sub> < 20mA	-	-	3	%
Standby current	I <sub>stby</sub>	-	-	134	285	nA
Maximum load current	I <sub>load</sub>	-	20	-	-	mA
Adjustment step	V <sub>adj</sub>	-	-	100	-	mV
Output voltage	V <sub>OUT</sub>	1mA < I <sub>load</sub> < 20mA; 2.25V < V <sub>DD_HV</sub> < 3.6V	V <sub>adj</sub> = "00"	-	1.1	1.11
			V <sub>adj</sub> = "01"	-	1.2	1.21
			V <sub>adj</sub> = "10"	-	1.3	1.31
			V <sub>adj</sub> = "11"	-	1.4	1.41
Output voltage accuracy	ΔV <sub>OUT</sub>	I <sub>load</sub> = 1mA; T = 25°C	-0.75	-	+0.75	%
		1mA < I <sub>load</sub> < 20mA; (V <sub>OUT</sub> + 0.5V) < V <sub>DD_HV</sub> < 3.6V	-1.25	-	1.25	
Output voltage drop	V <sub>drop</sub>	V <sub>DD_HV</sub> = 3.3V, I <sub>load</sub> = 20mA	93	145	218	mV
Load capacitance	C <sub>load</sub>	-	0.33	1	4.7	uF