

## PVT Detector

### OVERVIEW


PVT Detector is a unique solution intended to continuously monitor IC status at several on-die locations. It is able to detect manufacturing process deviation, perform voltage and die temperature measurement. PVT Detector consists of PVT module as a calculation center with embedded process detector units, and voltage/temperature sensor units. PVT module is able to maintain up to 16 external voltage/temperature sensor units for Core voltage measurement from 0.8V to 1.0V.

IP technology TSMC 28HPC CMOS 28nm.

IP status: silicon proven.

Silicon area: PVT module – 0.113mm<sup>2</sup>;

sensor unit – 0.000404mm<sup>2</sup>.

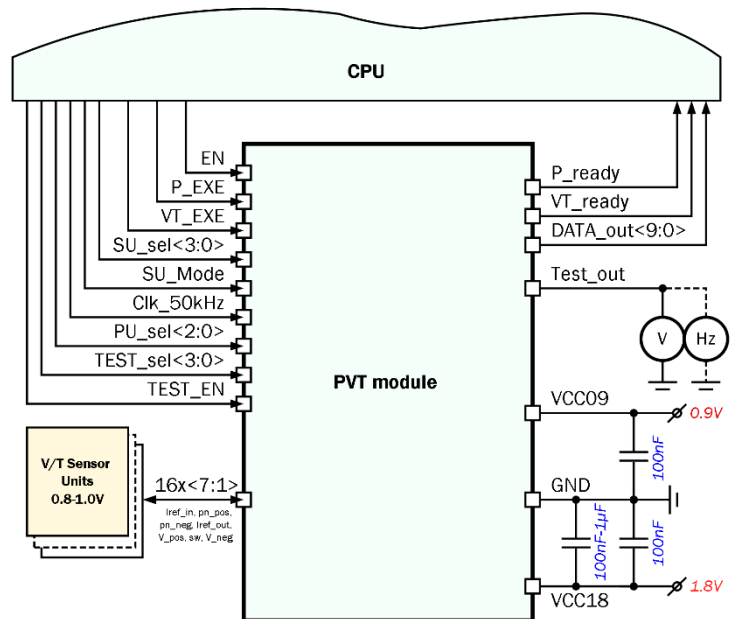

### ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Value			Units
			Min	Typ.	Max	
Core supply voltage	V <sub>CC09</sub>	-	0.81	0.9	0.99	V
IO supply voltage	V <sub>CC18</sub>	-	1.62	1.8	1.98	V
Operating temperature range	T <sub>j</sub>	-	-40	25	+125	°C
Current consumption		@ V <sub>CC09</sub>	-	250	400	uA
		@ V <sub>CC18</sub>	-	390	500	
Current consumption in standby mode		@ V <sub>CC09</sub>	-	2.5	55	uA
		@ V <sub>CC18</sub>	-	0.01	2	uA
Digital input-logic high	V <sub>IH</sub>	-	0.7V <sub>CC09</sub>	-	V <sub>CC09</sub>	V
Digital input-logic low	V <sub>IL</sub>	-	0	-	0.3V <sub>CC09</sub>	
Digital output-logic high	V <sub>OH</sub>	-	0.7V <sub>CC09</sub>	-	V <sub>CC09</sub>	
Digital output-logic low	V <sub>OL</sub>	-	0	-	0.3V <sub>CC09</sub>	
Output DATA resolution	K	-	-	10	-	bit
Clock frequency	f <sub>CLK</sub>	-	-	50	-	kHz
Voltage bandgap	V <sub>bg</sub>	-	-	716	-	mV
Voltage measurement range	V <sub>MR09</sub>	-	0.8	0.9	1.0	V
Voltage measurement accuracy	A <sub>V</sub>	with trimming	-	-	±2	%
		w/o trimming	-	-	±5	
Temperature measurement range	T <sub>MR</sub>	-	-40	-	+125	°C
Temperature measurement accuracy	A <sub>T</sub>	with trimming	-	-	±2	°C
		w/o trimming	-	-	±5	