

1-Channel GNSS Interference Resistant RF Front-End IC

1. OVERVIEW

NT1069-1 is an interference resistant RF Front-End IC which is intended for reception of all existing Global Navigational Satellite Systems (GNSS) signals such as GPS, GLONASS, Galileo, BeiDou, NavIC, QZSS in L1, L2, L3, L5, E1, E5a, E5b, E6, B1, B2, B3, S bands. The distinctive feature of NT1069-1 is high noise immunity, which is achieved by high linearity of the channel. The receiving channel consists of LNA, highly linear mixer, 2-stage IFA and output linear buffer. Gain of LNA and IFA can be controlled externally. Two-stage RF frequency filtration is performed on external components with the aim of noise immunity improvement. For better filtration all external components should be specially selected for each GNSS.

2. FEATURES

- Single conversion super heterodyne receiver including LNA, highly linear mixer, 2-stage IFA and output linear buffer
- LNA gain external control via pins #9–10
- IFA gain external control via pins #15–17, 20–22
- Interference resistance
- Channel input 3rd order intercept point up to +2dBm
- Analog differential output with two options of voltage swing 1Vp-p and 2Vp-p
- Two options of channel output frequency range – up to 50MHz and 100MHz
- 2-stage RF frequency external filtration
- External LO frequency input
- 5x5mm QFN32 package or 2.5x2.5mm WLSCP

3. APPLICATIONS

- GNSS based driverless car systems
- Professional drones
- Space-time processing (antenna arrays)
- Anti-jamming systems

4. DESCRIPTION

4.1. BLOCK DIAGRAM

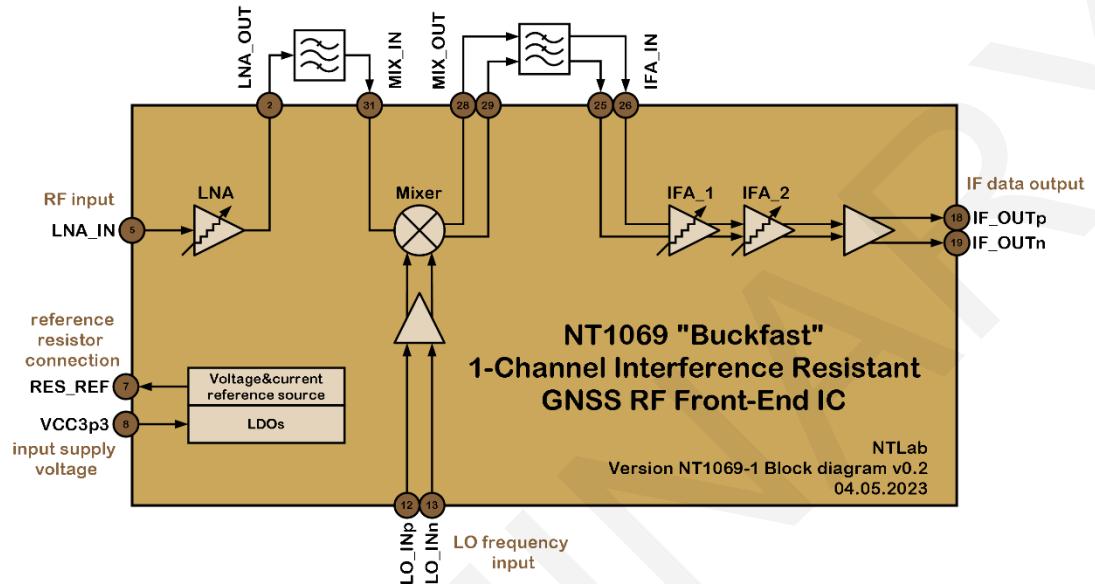


Figure 4.1: NT1069-1 “Buckfast” Block diagram

4.2. PINS DESCRIPTION

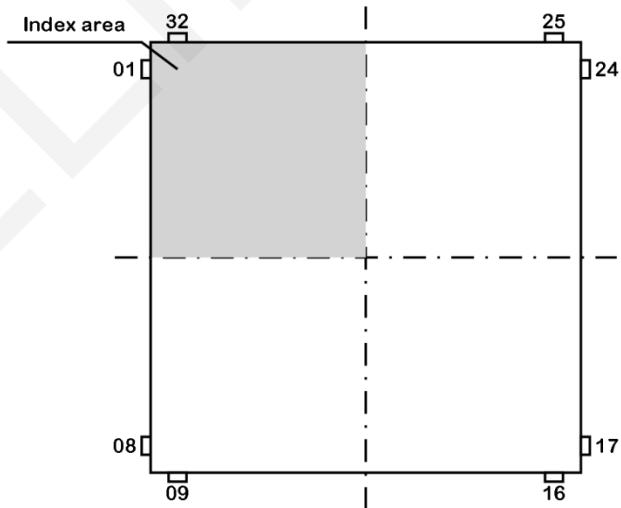


Figure 4.2: NT1069-1 “Buckfast” Pin configuration

Table 4.1: NT1069 pins description

#	Name	Description
1	MODE0	Operation mode (MODE0+MODE1): “00” Shutdown “01” Service mode “10” Service mode “11” Active mode
2	LNA_OUT	LNA output
3	RF_VCC	RF blocks supply voltage filtering capacitor
4	LNA_GND	LNA ground
5	LNA_IN	RF input
6	LNA_GND	LNA ground
7	RES_REF	External resistor for reference source
8	VCC3p3	Supply voltage 3.3V
9	LNA_GAIN0	LNA manual gain control inputs
10	LNA_GAIN1	
11	LO_GND	Local oscillator buffer ground
12	LO_INp	Local oscillator differential input
13	LO_INn	
14	LO_GND	Local oscillator buffer ground
15	IFA_GAIN0	IFA manual gain control inputs
16	IFA_GAIN1	
17	IFA_GAIN2	
18	IF_OUTp	IF data differential output
19	IF_OUTn	
20	IFA_GAIN3	IFA manual gain control inputs
21	IFA_GAIN4	
22	IFA_GAIN5	
23	N.C.	Not connected
24	IFA_VCC	IFA supply voltage filtering capacitor
25	IFA_INn	IFA differential input
26	IFA_INp	
27	IFA_GND	IFA ground
28	MIX_OUTp	Mixer differential output
29	MIX_OUTn	
30	MIX_GND	Mixer ground
31	MIX_IN	Mixer input
32	MODE1	Operation mode (refer to MODE0)

Table 4.2: Operation modes description

LNA gain control code	Active mode
“00”	Preset 1
“01”	Preset 2
“10”	Preset 3
“11”	Preset 4

4.3. APPLICATION SCHEMATIC

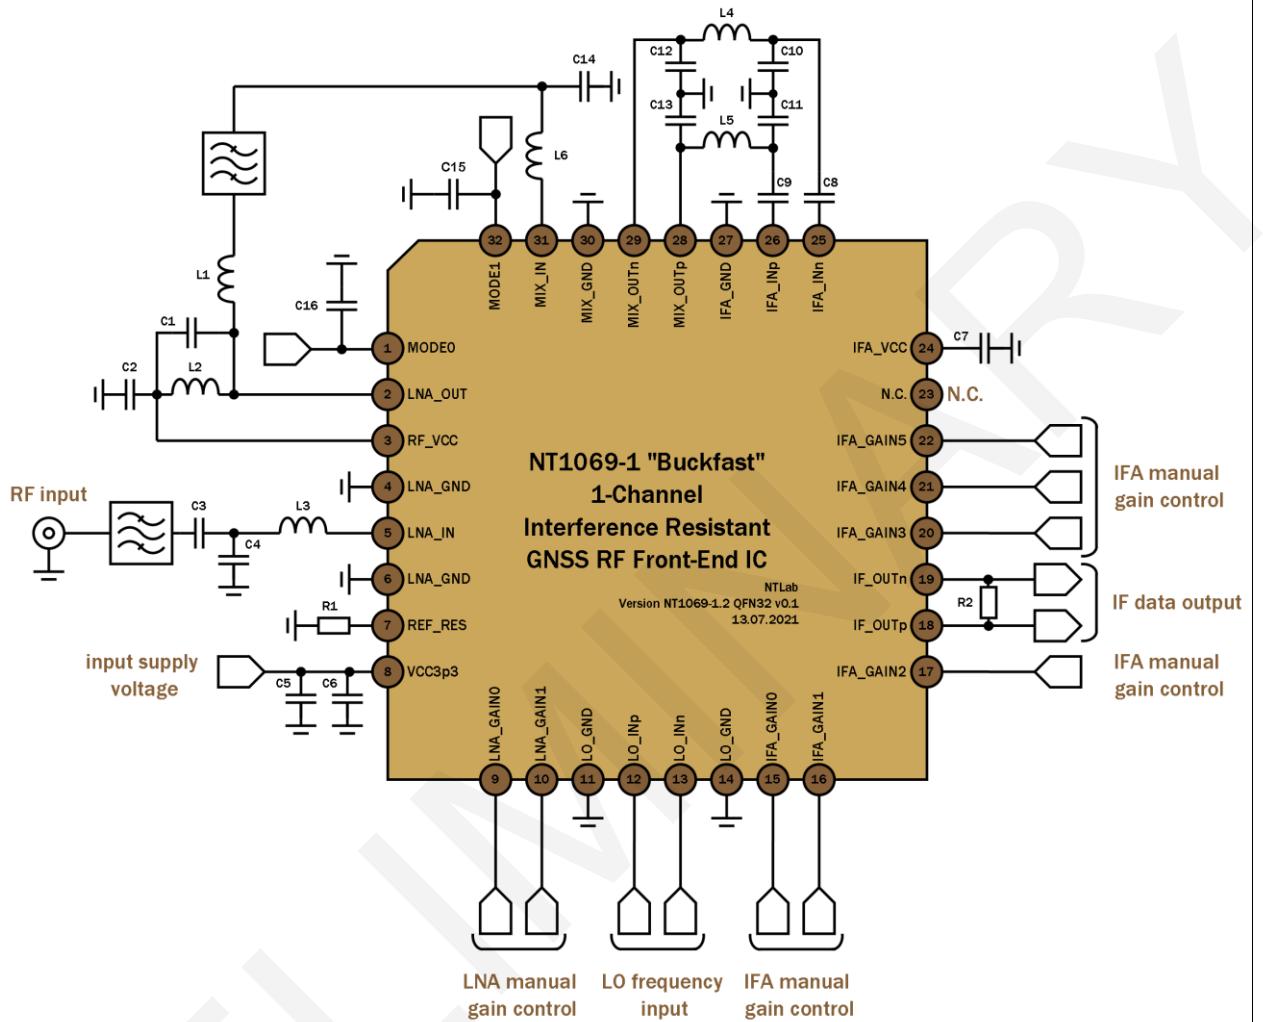


Figure 4.3: NT1069-1 “Buckfast” Application schematic (active mode)

Table 4.3: External components description

Component	Nominal value	Notes
C1	1pF	Matching LNA output network capacitor for L1 band
	2pF	Matching LNA output network capacitor for L2/L3/L5 band
	1pF	Matching LNA output network capacitor for S band
C2	100nF	Supply voltage filtering capacitor
C3	22pF	DC decoupling capacitor for L1 band
	22pF	DC decoupling capacitor for L2/L3/L5 band
	10pF	DC decoupling capacitor for S band
C4	2pF	Matching LNA input network capacitor for L1 band
	1.5pF	Matching LNA input network capacitor for L2/L3/L5 band
	–	Matching LNA input network capacitor for S band
C5	10μF	Main supply voltage filtering capacitor
C6	1nF	Main supply voltage filtering capacitor
C7	100nF	Supply voltage filtering capacitor
C8	10nF	DC decoupling capacitor
C9	10nF	DC decoupling capacitor
C10	5pF	External filter
C11	5pF	
C12	5pF	
C13	5pF	
C14	3.3pF	Matching mixer input network capacitor for L1 band
	3.0pF	Matching mixer input network capacitor for L2/L3/L5 band
	1.2pF	Matching mixer input network capacitor for S band
C15	100p	Blocking capacitor
C16	100p	Blocking capacitor
L1	1.5nH	Matching LNA output network inductor for L1 band
	7.5nH	Matching LNA output network inductor for L2/L3/L5 band
	1.3nH	Matching LNA output network inductor for S band
L2	4.3nH	LNA load inductor for L1 band
	8.7nH	LNA load inductor for L2/L3/L5 band
	1.3nH	LNA load inductor for S band
L3	5.1nH	Matching LNA input network inductor for L1 band
	7.5nH	Matching LNA input network inductor for L2/L3/L5 band
	1.5nH	Matching LNA input network inductor for S band
L4	51nH	External filter
L5	51nH	
L6	6.2nH	Matching mixer input network inductor for L1 band
	11nH	Matching mixer input network inductor for L2/L3/L5 band
	2.6nH	Matching mixer input network inductor for S band
R1	61.9kOhm	External reference resistor
R2	100Ohm/ 200Ohm	Load resistor

5. OPERATING CHARACTERISTICS

5.1. DC ELECTRICAL CHARACTERISTICS

The values of electrical characteristics are specified for $V_{cc} = 3.0 \text{ V}$ to 3.6V , $T_a = -60\dots+115^\circ\text{C}$. Typical values are at $V_{cc} = 3.3 \text{ V}$, $T_a = +25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Condition	Value			Unit	
			min	typ	max		
Overall							
Supply voltage	V_{cc}		3.0	3.3	3.6	V	
Current consumption	I_{cc}	NT1069-1 version A	Active mode	-	101	-	mA
		NT1069-1 version B		-	165	-	
	I_{SHD}	Shutdown		-	TBD	-	nA
Input logic-level high	V_{IH}	-	$0.8 \times V_{cc}$	-	-	V	
Input logic-level low	V_{IL}	-	-	-	$0.2 \times V_{cc}$	V	
Output logic-level high	V_{OH}		$0.8 \times V_{cc}$	-	-	V	
Output logic-level low	V_{OL}		-	-	$0.2 \times V_{cc}$	V	
IFA output DC level	V_{DC_IFA}	-	-	1.9	-	V	
RF supply voltage level	V_{RF_VCC}	-	-	2.9	-	V	
IFA supply voltage level	V_{IFA_VCC}	-	-	2.9	-	V	

5.2. AC ELECTRICAL CHARACTERISTICS

The values of electrical characteristics are specified for $V_{cc} = 3.0 \text{ V}$ to 3.6V , $T_a = -60\dots+115^\circ\text{C}$. Typical values are at $V_{cc} = 3.3 \text{ V}$, $T_a = +25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Condition	Value			Unit	
			min	typ	max		
Overall							
Channel input frequency range	F_{IN}	L1 band	1557	-	1611	MHz	
		L2/L3/L5 band	1167	-	1294		
		S band	2484	-	2500		
Channel input resistance	R_{IN}	-	-	50	-	Ohm	
Channel input VSWR	$VSWR_{IN}$	L1 band	@50Ohm, with matching circuits	-	1.2	-	
		L2/L3/L5 band		-	2.0		
		S band		-	3.3		
Channel output frequency range	F_{OUT}	NT1069-1 version A	2	-	50	MHz	
		NT1069-1 version B	2	-	100	MHz	
Channel load resistance	R_{LOAD}	-	-	100/200	-	Ohm	
Channel maximum power gain	G_P_{MAX}	Active mode (MODE<1:0>="11")	Note 1	-	61.9/61.3	-	dB
Channel minimum power gain	G_P_{MIN}	Active mode (MODE<1:0>="11")	Note 1	-	5.6/5.0	-	dB
Channel noise figure	NF	$G_P_{LNA}=\text{Preset 1}$	Note 2	-	10.0	-	dB
		$G_P_{LNA}=\text{Preset 3}$		-	15.3		
Channel input 1dB compression point	IP_{1dB}	$G_P_{LNA}=\text{Preset 1}$	Note 2	-	-21.4	-	dBm
		$G_P_{LNA}=\text{Preset 3}$		-	-20.4		
Channel input 3 rd order intercept point	IIP3	$G_P_{LNA}=\text{Preset 1}$	Note 3	-	-2.8	-	dBm
		$G_P_{LNA}=\text{Preset 3}$		-	+2.0		

Note 1: Without filters F1 and F2 losses; L1 band, $V_{OUT_IFA}=1\text{Vp-p}$; $R_{LOAD} = 100\text{Ohm}/200\text{Ohm}$.

Note 2: Without filter F1, filter F2 losses 3.0dB, total $G_P=33\text{dB}$; L1 band; $V_{OUT_IFA}=1\text{Vp-p}$, $R_{LOAD_IFA}=100\text{Ohm}$, $F_{OUT}=20\text{MHz}$, $P_{LO}=+5\text{dBm}$.

Note 3: Without filter F1, filter F2 losses 3.0dB, total $G_P=33\text{dB}$; L1 band; $V_{OUT_IFA}=1\text{Vp-p}$, $R_{LOAD_IFA}=100\text{Ohm}$, $F_{OUT}=15\&20\text{MHz}$, $P_{LO}=+5\text{dBm}$.

Parameter	Symbol	Condition	Value			Unit	
			min	typ	max		
LNA							
LNA operating frequency range	F _{IN_LNA}	L1 band	1557	—	1611	MHz	
		L2/L3/L5 band	1167	—	1294		
		S band	2484	—	2500		
LNA input resistance	R _{IN_LNA}	—	—	50	—	Ohm	
LNA input VSWR	VSWR _{IN_LNA}	With matching circuit for each band	@50Ohm	—	1.5	—	
LNA output resistance	R _{OUT_LNA}	—	—	50	—	Ohm	
LNA output VSWR	VSWR _{OUT_LNA}	With matching circuit for each band	@50Ohm	—	1.5	—	
LNA power gain	G _{P_LNA}	Preset 1	L1 band	—	15.1	—	
		Preset 2		—	11.8	—	
		Preset 3		—	8.8	—	
		Preset 4		—	4.6	—	
		Preset 1	L2/L3/L5 band	—	15.2	—	
		Preset 2		—	11.9	—	
		Preset 3		—	8.7	—	
		Preset 4		—	5.3	—	
		Preset 1	S band	—	9.7	—	
		Preset 2		—	5.1	—	
		Preset 3		—	1.9	—	
		Preset 4		—	-4.0	—	
Mixer							
Mixer input frequency range	F _{IN_MIX}	L1 band	1557	—	1611	MHz	
		L2/L3/L5 band	1167	—	1294		
		S band	2484	—	2500		
Mixer input resistance	R _{IN_MIX}	—	—	50	—	Ohm	
Mixer input VSWR	VSWR _{IN_MIX}	With matching circuit for each band	@50Ohm	—	1.5	—	
Mixer output resistance	R _{OUT_MIX}	Differential output	—	200	—	Ohm	
Mixer output frequency range	F _{OUT_MIX}	—	2	—	100	MHz	
Mixer power gain	G _{P_MIX}	—	—	0	—	dB	
LO frequency range	F _{LO}	—	1100	—	2550	MHz	
LO frequency input resistance	R _{IN_LO}	Differential input	—	100	—	Ohm	
LO frequency input level	P _{LO}	—	-10	—	+5	dBm	
IFA							
IFA operating frequency range	F _{IFA}	NT1069-1 version A	C _{LOAD} =10pF	2	—	50	MHz
		NT1069-1 version B		2	—	100	MHz
IFA input resistance	R _{IN_IFA}	Differential input	—	200	—	Ohm	
IFA load resistance	R _{LOAD_IFA}	Differential output	—	100/200	—	Ohm	
IFA maximum power gain	G _{P_IFA_MAX}	R _{LOAD_IFA} = 100Ohm/200Ohm	—	46.8/46.2	—	dB	
IFA minimum power gain	G _{P_IFA_MIN}	R _{LOAD_IFA} = 100Ohm/200Ohm	—	1.0/0.4	—	dB	
IFA gain resolution	G _{P_RES_IFA}	—	—	6	—	bit	
IFA power gain step	ΔG _{P_IFA}	—	—	0.73	—	dB	
Maximum voltage at the differential linear outputs	V _{OUT_IFA}	—	2	3	—	V _{p-p}	

6. PACKAGE INFORMATION

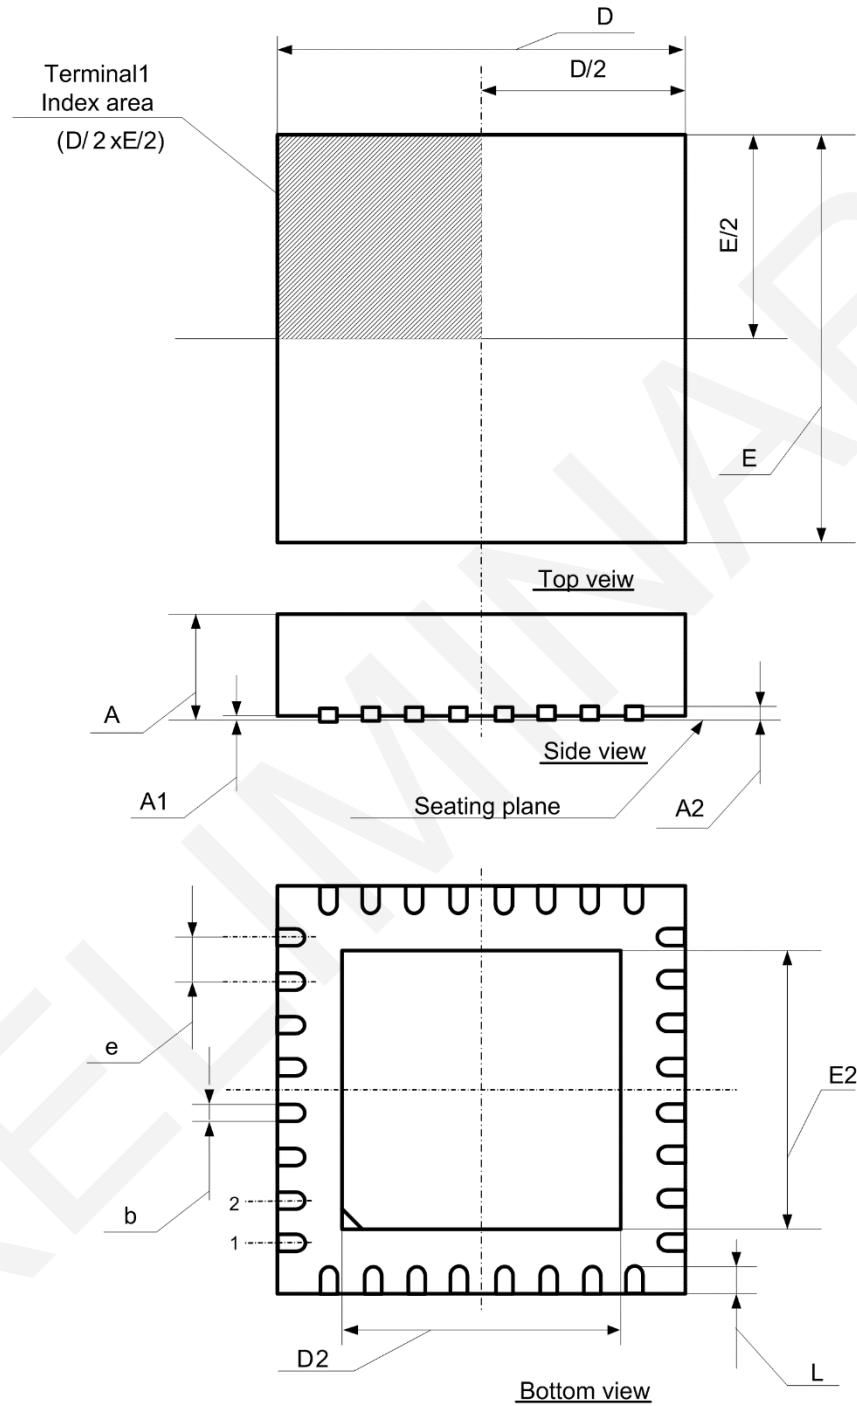


Figure 6.1: Package QFN32 5×5

Table 6.1: Package QFN32 5×5 dimension

Unit	A	A1	A2	b	D	D2	E	E2	e	L
min, mm	0.80	0.00	0.203 REF	0.18	4.90	3.15	4.90	3.15	0.50 BSC	0.35
typ., mm	0.85	0.02		0.25	5.00	3.20	5.00	3.20		0.40
max, mm	0.90	0.05		0.30	5.10	3.25	5.10	3.25		0.45